


RMAX® BELOW GRADE

SLAB ON GRADE APPLICATION

Rmax® Below Grade may be installed horizontally under foundations and vertically inside of the footings. A separate vapor retarder sheet should be installed over or under the insulation against the crushed stone base and well tamped backfill or undisturbed earth. Simply lay in the insulation with tightly butted joints.

Refer to Rmax® Below Grade Product Data Sheet for additional application/installation, compliances, thermal and physical properties, limitations and warnings.

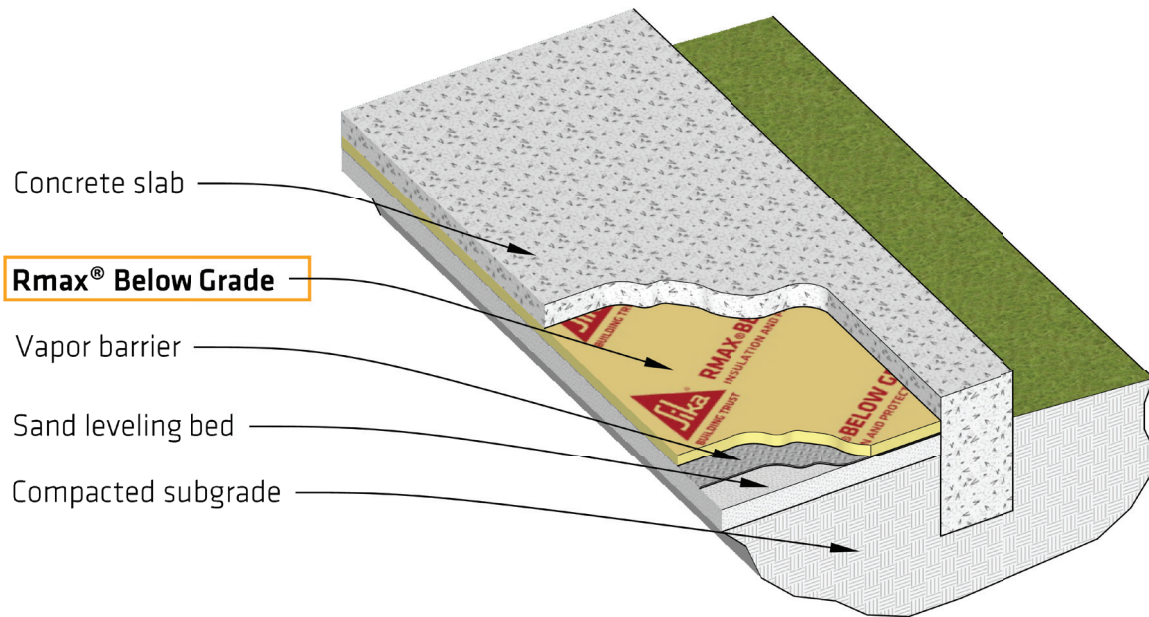

NOTE:

1. Use of the insulation board in areas where the probability of termite infestation is “very heavy” must be in accordance with Chapter 26 of the IBC.
2. Exact placement of the polyethylene vapor barrier is up to the building designer and local code requirements.

Warranty: See Rmax® sales policy and limited warranties for terms and conditions. Rmax® does not assume any responsibility or liability for the performance of any products other than those manufactured by Rmax. NOTE: Factory packaging should not be relied upon as protection at job sites or other outdoor storage locations. When short-term outdoor storage is necessary, take the following precautions: Store flat above ground on raised pallets, place bundles on finished surfaces, cover with a breathable tarpaulin and secure cover to prevent wind displacement.